



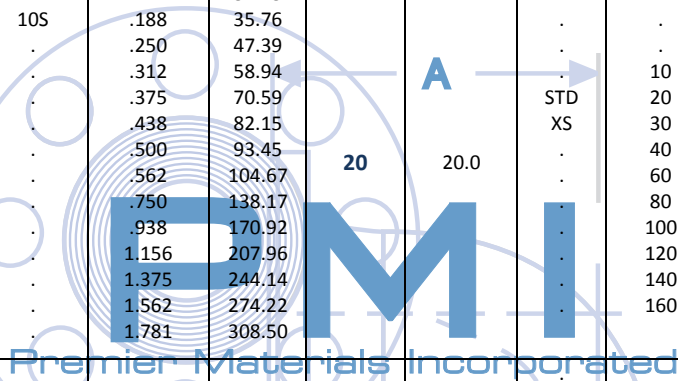


Pipe Size (inches)	Outside Diameter (inches)	Identification			Wall Thickness--t- (inches)	Wt/Ft Pounds	Pipe Size (inches)	Outside Diameter (inches)	Identification			Wall Thickness --t- (inches)	Wt/Ft Pounds
		Steel		Stainless Steel Schedule					Steel		Stainless Steel Schedule		
		Iron Pipe Size	Schedule No.						Iron Pipe Size	Schedule No.			
1/8	.405	.	.	10S	.049	.19	1/4	.540	.	.	10S	.065	.33
		STD	40	40S	.068	.24			STD	40	40S	.088	.42
		XS	80	80S	.095	.31			XS	80	80S	.119	.54
3/8	.675	.	.	10S	.065	.42	1/2	.840	.	.	5S	.065	.54
		STD	40	40S	.091	.57			STD	40	40S	.109	.85
		XS	80	80S	.126	.74			XS	80	80S	.147	1.09
				XXS	160	.	.187	1.31
3/4	1.050	.	.	5S	.065	.69	1	1.315	.	.	5S	.065	.87
		STD	40	10S	.083	.86			STD	40	10S	.109	1.40
		XS	80	40S	.113	1.13			XS	80	40S	.133	1.68
		.	160	80S	.154	1.47			XXS	160	80S	.179	2.17
		XXS	.	.	.219	1.94			XXS	.	.	.250	2.84
1-1/4	1.660	.	.	5S	.065	1.11	1-1/2	1.900	.	.	5S	.065	1.28
		STD	40	10S	.109	1.81			STD	40	10S	.109	2.09
		XS	80	40S	.140	2.27			XS	80	40S	.145	2.72
		.	160	80S	.191	3.00			XXS	160	80S	.200	3.63
		XXS	.	.	.250	3.76			XXS	.	.	.281	4.86
2	2.375	.	.	5S	.065	1.61	2-1/2	2.875	.	.	5S	.083	2.48
		STD	40	10S	.109	2.64			STD	40	10S	.120	3.53
		XS	80	40S	.154	3.65			XS	80	40S	.203	5.79
		.	160	80S	.218	5.02			XXS	160	80S	.276	7.66
		XXS	.	.	.344	7.46			XXS	.	.	.375	10.01
3	3.500	.	.	5S	.083	3.03	3-1/2	4.00	.	.	5S	.083	3.48
		STD	40	10S	.120	4.33			STD	40	10S	.120	4.97
		XS	80	40S	.216	7.58			XS	80	40S	.226	9.11
		.	160	80S	.300	10.25			XXS	160	80S	.318	12.5
		XXS	.	.	.438	14.32			XXS	.	.	.636	22.85
4	4.500	.	.	5S	.083	3.915	5	5.563	.	.	5S	.109	6.35
		STD	40	10S	.120	5.613			STD	40	10S	.134	7.77
		XS	80	40S	.237	10.79			XS	80	40S	.258	14.62
		.	120	.	.438	19.00			XXS	120	.	.500	27.04
		XXS	160	.	.531	22.51			XXS	160	.	.625	32.96
6	6.625	.	.	5S	.083	3.915	8	8.625	.	.	5S	.109	9.94
		STD	40	10S	.120	5.613			STD	40	10S	.134	13.40
		XS	80	40S	.237	10.79			XS	80	40S	.258	22.36
		.	120	.	.438	19.00			XXS	120	.	.500	24.70
		XXS	160	.	.531	22.51			XXS	160	.	.625	28.55
10	10.750	.	.	5S	.109	7.60	12	12.75	.	.	5S	.156	20.98
		STD	40	10S	.134	9.29			STD	40	10S	.180	24.17
		XS	80	40S	.280	18.97			XS	80	40S	.330	33.38
		.	120	.	.432	28.57			XXS	120	.	.406	43.77
		XXS	160	.	.562	36.39			XXS	160	.	.500	49.56
	719	45.35		562	53.52
	864	53.16		688	73.15
	844	88.63
	844	107.32
		1.000	125.49
		1.125	139.67
.	1.312	160.27				

Pipe Size (inches)	Outside Diameter (inches)	Identification			Wall Thickness-t- (inches)	Wt/Ft Pounds	Pipe Size (inches)	Outside Diameter (inches)	Identification			Wall Thickness-t- (inches)	Wt/Ft Pounds
		Steel		Stainless Steel Schedule					Steel		Stainless Steel Schedule		
		Iron Pipe Size	Schedule No.						Iron Pipe Size	Schedule No.			
14	14.00	.	.	5S	.156	23.07	16	16.00	.	.	5S	.165	27.90
		.	10	10S	.188	27.73			.	.	10S	.188	31.75
		.	20	.	.250	36.71			.	10	.	.250	42.05
		STD	30	.	.312	45.61			.	20	.	.312	52.27
		.	40	.	.375	54.57			STD	30	.	.375	62.58
		XS	.	.	.438	63.44			.	40	.	.500	82.77
		.	60	.	.500	72.09			.	60	.	.656	107.50
		.	80	.	.594	85.05			.	80	.	.844	136.61
		.	100	.	.750	106.13			.	100	.	1.031	164.82
		.	120	.	.938	130.85			.	120	.	1.219	192.43
		.	140	.	1.094	150.93			.	140	.	1.438	223.64
		.	160	.	1.250	170.21			.	160	.	1.594	245.25
		.	.	.	1.406	189.11		
18	18.00	.	.	5S	.165	31.43	20	20.0	.	.	5S	.188	39.78
		.	10	10S	.188	35.76			.	.	10S	.218	46.06
		STD	20	.	.250	47.39			.	10	.	.250	52.73
		.	30	.	.312	58.94			STD	20	.	.375	78.60
		XS	.	.	.375	70.59			.	30	.	.500	104.13
		.	40	.	.438	82.15			XS	30	.	.594	123.11
		.	60	.	.500	93.45			.	40	.	.594	123.11
		.	80	.	.562	104.67			.	60	.	.812	166.40
		.	100	.	.750	138.17			.	80	.	1.031	208.87
		.	120	.	.938	170.92			.	100	.	1.281	256.10
		.	140	.	1.156	207.96			.	120	.	1.500	296.37
		.	160	.	1.375	244.14			.	140	.	1.750	341.09
		.	.	.	1.562	274.22			.	160	.	1.969	379.17
.	.	.	1.781	308.50			
22	22.00	.	.	5S	.188	43.80	24	24.00	.	.	5S	.218	55.37
		.	10	10S	.218	50.71			.	10	10S	.250	63.41
		STD	20	.	.250	58.07			STD	20	.	.375	94.62
		.	30	.	.375	86.61			XS	30	.	.500	125.49
		XS	60	.	.500	114.81			.	40	.	.562	140.68
		.	80	.	.875	197.41			.	60	.	.688	171.29
		.	100	.	1.125	250.81			.	80	.	.969	238.35
		.	120	.	1.375	302.88			.	100	.	1.219	296.58
		.	140	.	1.625	353.61			.	120	.	1.531	367.39
		.	160	.	1.875	403.00			.	140	.	1.812	429.39
		.	.	.	2.125	451.06			.	160	.	2.062	483.12
		2.344	542.13
	
26	26.00	.	10	.	.312	85.60	28	28.00	.	10	.	.312	92.26
		STD	.	.	.375	102.63			STD	.	.	.375	110.64
		XS	20	.	.500	136.17			XS	20	.	.500	146.85
.	
30	30.00	.	10	5S	.250	79.43	32	32.00	.	10	.	.312	105.59
		STD	.	10S	.312	98.93			STD	.	.	.375	126.66
		.	20	.	.375	118.65			XS	20	.	.500	168.21
		XS	30	.	.500	157.53			.	30	.	.625	209.43
.	
34	34.00	.	10	.	.312	112.25	36	36.00	.	10	.	.312	118.92
		STD	.	.	.375	134.67			STD	.	.	.375	142.68
		XS	20	.	.500	178.89			XS	20	.	.500	189.57
		.	30	.	.625	222.78			.	30	.	.625	236.35
.	
42	42.00	STD	.	.	.375	166.71	48	48.00	.	30	.	.375	190.74
		XS	20	.	.500	221.61		
		.	30	.	.625	276.18			.	60	.	.500	253.65
.	
.	.	.	40	.	.750	330.41	



Premier Materials, Inc.
9705 Port Erroll Rd.
Houston TX 77095
Ph: 281-463-3036 Fax: 281-463-3036
www.premiermaterialsinc.com



WEIGHT FORMULA WT/FT=10.69 X (OD-WALL THICKNESS)X WALL THICKNESS